



Camozzi Solutions for Fluids
 **C_Fluid Control**

Solutions for oxygen applications

Camozzi Solutions for Fluids **C_Fluid Control**

Handling oxygen requires specific skills as well as the implementation of dedicated production procedures. Through business development and dedicated production areas, Camozzi Automation spa can supply the customer with a wide range of standard and customized solutions for oxygen service, as a function of its demands.

The Camozzi C_Fluid Control department manages the design and manufacture of valves, fittings, pressure regulators, manifolds and sub-bases intended for use in oxygen-enriched environments.



Oxygen Properties and Characteristics

Oxygen is one of the basic chemical elements. In its most common form, oxygen is an odourless, colourless gas found in air. It is one of the life-sustaining elements on Earth and is needed by all animals. Oxygen makes up 21% of the earth's atmosphere and in a pure state, is used in medical facilities and patient's homes in order to therapeutically increase the oxygen levels of humans.

Because of these characteristics oxygen is used in aquaculture, medical applications, but also in industrial applications. Industrial application of oxygen may include metal cutting, metal cleaning, welding, hardening and scarfing, increase furnaces efficiency, chemical applications. Oxygen itself is non-flammable but causes combustible materials to burn vigorously and is a highly oxidizing gas, being heavier than air, it can accumulate in low lying areas such as pits, trenches or underground rooms.

Hazards of oxygen enriched atmospheres

Only certain materials are suitable for use in oxygen service, a not correct choice of the materials used may cause rapid ageing of the component or a fire hazard. Not only the materials used are important, but also lubrication and cleanness of surfaces exposed to oxygen enriched environments are essential for your safety; oil and grease may become a powerful combustible in contact with oxygen. In essence nearly all materials are combustible in oxygen. Safe equipment for oxygen service is achieved by careful selection of suitable materials or combination of materials and their use in a particular manner.

The Camozzi clean room

In Camozzi all the materials chosen for oxygen enriched environments are carefully selected. Gaskets and non-metallic materials dedicated to oxygen service are compatible with oxygen, no organic sealants, adhesives or lubricants used in the manufacturing process. An accurate level of cleanliness is guaranteed by qualified personnel and by cleaning procedures, both organic and inorganic contaminants such as particulate matter and Hydrocarbon oils are removed by a careful ultrasonic cleaning. The process is periodically monitored through ASTM G93.

Valves, fittings, pressure regulators, manifolds and sub-bases could be supplied with two levels of cleanliness:

OX1


Non-volatile residue equal to or less than 550 mg/m²
 Level OX1: ultrasonic cleaning of components, inspection with UV black light, lubrication (only if necessary for the product's operation) with a specific grease suitable to be used with oxygen. Assembly, testing and packaging outside the clean room.

OX2

Non-volatile residue equal to or less than 33 mg/m²
 Level OX2: ultrasonic cleaning of components, inspection with UV black light, lubrication (only if necessary for the product's operation) with a specific grease suitable to be used with oxygen. Assembly, testing and packaging inside a clean room with ISO 7 classification according to ISO 14644-1.

Class	maximum number of particles/m ³			FED STD 209E
	≥ 0.5 μm	≥ 1 μm	≥ 5 μm	
ISO 7	352,000	83,200	2,930	Class 10,000

UV

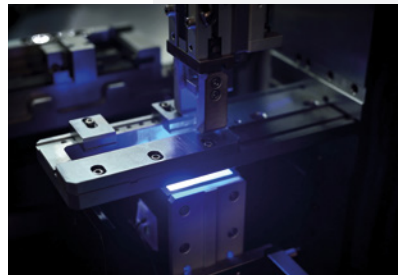

UV Black light evidences eventual traces of hydrocarbons, grease or particulate.



Fittings

Series 6000 super-rapid fittings for plastic tubes



- » Material: nickel-plated brass
- » Tube external diameters: 3, 4, 5, 6, 8, 10, 12, 14, 16mm
- » Fittings threads: M3, M5, M6, M7, G1/8, G1/4, G3/8, G1/2, G3/4, R1/8, R1/4, R3/8, R1/2
- » Seals: PTFE or FKM/EPDM on the threaded connection, FKM/EPDM and inside the super-rapid fitting.

Series 7000 super-rapid Compact fittings



- » Tube external diameters: 4, 6, 8, 10, 12, 16mm
- » Fittings threads: M5, M7, G1/8, G1/4, G3/8, G1/2, G3/4
- » Seals: FKM/EPDM on the threaded connection and inside the super-rapid fitting, EPDM/FKM PTFE coated on the adjustable part

Series 8000 dual seal super-rapid fittings



- » Material: nickel-plated brass
- » Tube external diameters: 4, 6, 8, 10, 12mm
- » Fittings threads: G1/8, G1/4, G3/8, G1/2
- » Seals: PTFE or FKM/EPDM on the threaded connection and the Super Rapid, FKM/EPDM PTFE coated on the adjustable

Series H8000 fittings with double tightening for harsh environments



- » Material: nickel-plated brass
- » Diameters: 4, 6, 8, 10, 12, 14, 16mm
- » Fittings threads: Gas cylindrical ISO-228 (BSP)
- » Seals: PTFE or FKM/EPDM on the threaded connection and the Super Rapid, FKM/EPDM PTFE coated on the adjustable

Series 5000 quick-release couplings



- » Nominal diameters: 5, 7 mm
- » Couplings threads: G1/8, G1/4, G3/8, G1/2
- » Plastic tubes: 6/4, 8/6, 10/8
- » Rubber hoses: 6x14, 8x17, 10x19, 13x23
- » Seals: FKM/EPDM

Series 1000 rapid push-in fittings for plastic tubes



- » Material: nickel-plated brass
- » Tube external diameters: 5/3, 6/4, 8/6, 10/8, 12/10, 15/12.5mm
- » Fittings threads: M5, M6, M12 x1, M12 x1.25, G1/8, G1/4, G3/8, G1/2, R1/8, R1/4, R3/8, R1/2
- » Seals: PTFE or FKM/EPDM on the threaded connection, FKM PTFE coated on the adjustable part

The complete catalogue of our fittings is available on the site catalogue.camozzi.com

General terms and conditions for sale are available on www.camozzi.com

Unidirectional & Bidirectional Flow Regulators - Unidirectional valves

Series SCU, MCU, SVU, MVU, SCO, MCO flow control valves



- » Unidirectional and bidirectional banjo flow control regulators
- » Ports: M5, G1/8, G1/4, G3/8, G1/2
- » Seals: FKM/EPDM FKM PTFE coated on the regulation screw

Series PSCU, PMCU, PSVU, PMVU, PSCO, PMCO flow control valves



- » Unidirectional and bidirectional flow regulators with banjo in brass (M5) or in technopolymer (G1/8, G1/4, G3/8)
- » Ports: M5, G1/8, G1/4, G3/8
- » Seals: FKM/EPDM FKM PTFE coated on the regulation screw

Series GSCU, GMCU, GSVU, GMVU, GSCO, GMCO flow control valves



- » Unidirectional and bidirectional banjo flow controllers
- » Nominal diameter: 1.5mm - 3.5mm - 5mm
- » Ports: M5, G1/8 and G1/4
- » Seals: FKM/EPDM FKM PTFE coated on the regulation screw

Series VNRC 500 unidirectional valve



- » Materials: stainless steel and polimer
- » Nominal diameter: 4mm
- » Cartridge version
- » Seals: FKM/EPDM

Proportional solenoid valves

Series AP directly operated proportional valves



- » 2/2-way proportional valves, NC
- » Sizes: 16 - 22mm
- » Nominal diameters: 0.8 ÷ 2.4mm
- » Seals: FKM

Series CP directly operated and pressure compensated proportional solenoid valves



- » Function: 2/2-way NC
- » Sizes: 16mm (orifices 1, 2.5mm) and 20mm (orifices 3 - 4.4mm)
- » Seals: FKM

The complete catalogue of our flow regulators and solenoid valves is available on the site catalogue.camozzi.com

General terms and conditions for sale are available on www.camozzi.com


Solenoid valves

Directly operated solenoid valves (Series K8, K8B) Size: 8mm



- » Orifices: 0.5mm – 0.7mm
- » Functions: 2/2 NC - 3/2 NC - 2/2 NO - 3/2 NO 3/2 UNI
- » Flows up to 180NI/min
- » Seals: FKM

Directly operated solenoid valves (Series K, KN, KNHF) Size: 10mm

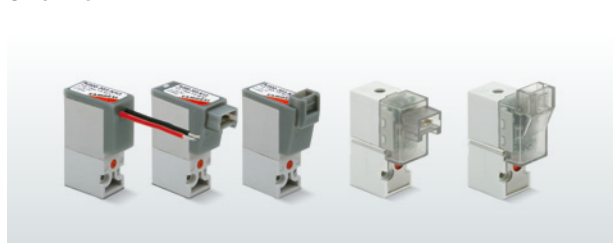

- » Orifices: 0.6mm – 1mm
- » Functions: 2/2 NC - 3/2 NC - 3/2 NO
- » Seals: FKM

Directly operated solenoid valves (Series P, PL, W) Size: 15mm



- » Orifices: 0.8mm – 1.6mm
- » Functions: 2/2 NC - 3/2 NC - 3/2 NO
- » Seals: FKM

Directly operated solenoid valves (Series PD) Size: 15mm



- » Orifices: 0.8mm – 2.6mm
- » Function: 2/2 NC
- » Seals: FKM

Directly operated solenoid valves (Series A) Size: 22mm



- » Orifices: 1.5mm – 2.5mm
- » Functions: 2/2 NC - 3/2 NC - 2/2 NO - 3/2 NO
- » Seals: FKM

Directly operated solenoid valves (Series 6) Size: 32mm



- » Orifices: 2mm – 4mm
- » Functions: 2/2 NC - 3/2 NC - 3/2 NO
- » Seals: FKM

Pneumatic operated and cartridge valves (Series 8)



- » Flow: 420NI/min ÷ 1480NI/min
- » Functions: 2/2 NC - 3/2 NC - 2/2 NO - 3/2 NO
- » Seals: FKM

Fluid separation solenoid valves (Series K8DV - PDV)



- » Sizes: 8mm and 15mm
- » Orifices: 0.8mm – 2mm (size 15mm)
- » Function: 2/2 NC
- » Seals: FKM

The complete catalogue of our solenoid valves is available on the site catalogue.camozzi.com

General terms and conditions for sale are available on www.camozzi.com

Treatment & Pressure Regulators

Series M pressure microregulators



- » Material: brass
- » Ports: G1/8 – G1/4
- » Nominal flow: 480 l/min
- » Seals: FKM

Series TC1-R Pressure Micro-Regulator OX2 Compliant



- » Materials: PPS – stainless steel
- » Ports: G1/8 – 1/8 NPT
- » Working pressure: 0.5 ÷ 4 bar
- » Seals: FKM

Series K8P electronic proportional micro regulator



- » Pad mounting body
- » Analogical input: 0-10V DC or 4-20 mA
- » Regulated pressure: 0.5 ÷ 10 bar or 0.15 ÷ 3 bar
- » Seals: FKM

Series N filter



- » Surface filter
- » Filtering element (Bronze): 5 μ m
- » Ports: G1/8 or G1/4
- » Seals: EPDM

Series TC1-V shut-off micro-valves



- » Material PPS – Stainless steel
- » Ports: G1/8 – 1/8 NPT
- » Working pressure 0.5 ÷ 4 bar
- » Seals: FKM

The complete pressure regulators of our products is available on the site catalogue.camozzi.com

General terms and conditions for sale are available on www.camozzi.com



Contacts

fluid@camozzi.com

For further information about our products and conditions of sale,
please contact the Camozzi C_Fluid Control department at:

Camozzi spa
Società Unipersonale
Via Eritrea, 20/I
25126 Brescia - Italy
Tel. +39 030 37921

Technical assistance

Product inquiries and requests for support:
Tel. +39 030 3792790
service@camozzi.com

Sales Department

Tel. +39 030 3792262
sales@camozzi.com